

Pro Rx-T2 DVB-T/T2 RF signal receiver



PRO RX T2

Main Features

DVB-T2 signal reception features:

- Automatic L1 signaling decoding.
- Fully compliant to all the standard Guard Intervals; Code Rates, Constellations.
- Provides manual selection of a single stream from single or multiple PLP input signal.
- Automatic output constant stream rate;

DVB-T signal reception features:

- Automatic TPS signaling decoding;
- Fully compliant to all the standard Guard Intervals; Code Rates, Constellations.
- Fast automatic 2k – 8k acquisition.
- Automatic spectral inversion.

Pro Rx T2 provides the following monitoring and statistics:

- SNR estimation.
- MER measure.
- Pre LDPC, BCH BER.
- Post BCH FER (FEC block Error Rate).
- Percentage signal quality.
- P1 parameters monitoring.
- L1 pre/post parameters monitoring.

1 x RF Input for each receiver board

- Frequency: 42 to 866 MHz

1 x Common Interface (for each receiver)

Connector used as input CAM

- Connector type: PCMCIA
- DVB-CI EN 50221-1997

1 x FastEthernet (Management)

- Connector: RJ45
- Standard supported: IEEE 802.3

3 x ASI Output (same content)

- TS Descrambled (TSD)
- Connector type: BNC
- Input: 75 ohm, 800 mVpp (500 to 1200mVpp)
- MPEG-2 TS ISO/IEC 13818-1
- CEI EN 50083-9,

Management of the devices is made through:

- Java GUI on Ethernet connection.
- SNMP agent.

Power Supply

- Dual Power Supply (only in 1+1 or 2+0 configuration)
- 110/220V AC Auto Switching
- 48V DC (Option on Request)

Description

The PRO-RX T2 is a multi-standard (DVB-T and DVB-T2) receiver, with integrated DVB-T and DVB-T2 receiver, DVB descramblers and a DVB decoder.

Pro Rx-T2 receives a RF signal modulated with standard ETSI EN 302755 or ETSI EN 300744, demodulates it and output a MPEG-2 TS over ASI. The on-board PCMCIA slot provides common interface connection to descramble encrypted contents. PRO-RX T2 receiver is designed to receive a TV signal, complying with ETSI EN 302 755 v1.2.1_0.11 (2009-2010) or ETSI EN 300 744, at a given frequency, demodulate it, decode the Transport Stream, descramble selected services and output the stream over ASI interface. As alternative to RF signal, it can directly receive an MPEG Transport Stream, complying with ISO/IEC standard 13818-1 (or ITU-T Rec. H.222.0), decode it, descramble selected services and output the stream over ASI interface. PRO-RX T2 receiver can operate either as DVB-T or as DVB-T2 receiver.

One of the main feature of PRO-RX T2 is the monitoring of all parameters of demodulation process both for DVB-T and for DVB-T2 input signal. Furthermore, it provides the plots of actual Constellation and Channel Impulse Response.



PRO RX T2 In 1+1 configuration



DVB-T2 DEMODULATOR FEATURES

DVB-T2 input monitoring provided	
DVB-T2 signal lock	
Carrier offset of the currently tuned channel	
SNR estimation made by the demodulator	
MER (Modulation Error Ratio) of the T2 demodulator	
Pre LDPC BER	
Pre-BCH BER	
Post BCH FER (FEC block error rate)	
The signal quality as a percentage (0-100)	
Active PLP information monitoring of data and common PLP for multiple PLP	
Data PLP error indicator	
L1 change indicator	
Synchronization state of the T2 demodulator	
L1 post lock	
Demodulated *estimated* DVB-T2 TS (Transport Stream) rate	
S1 Field	S1 signalling, SISO/MISO indication
S2 Field	The pre-amble mixed indicator
	The FFT mode of transmission
L1-pre signaling	The stream type contained within the current T2 superframe
	BW extension indicator
	S1 signalling, P1 S1
	S2 signalling, P1 S2
	L1 repetition flag
	The guard interval used for the super-frame
	L1-pre PAPR (Peak to Average Power Ratio) indicator
	The L1-post modulation in this frame
	The L1-post code rate in this frame
	The L1-post FEC type
	Size of the L1-post in OFDM cells
	L1-post info size = L1-post configurable+dynamic+extension
	The pilot pattern for the OFDM symbols in this frame
	The TX Id
	The T2 cell Id
	The T2 network Id
	T2 system Id
	Number of T2-frames per T2 super-frame
	Number of OFDM symbols per T2-frame
	Regeneration count indicator
	L1-post extensions enabled
	The number of RF frequencies in use
	The current RF index
L1-post signaling	The number of sub-slices per T2 frame
	The number of PLPs in the current superframe
	Number of auxiliary streams
	Auxiliary stream config (Reserved for Future Use)
	Indicates the type of FEF part
	The length of the FEF as part of the elementary period
	The number of T2-frames between two FEF parts
	The PLP ID
	The type of the PLP
	The payload carried by the PLP
	The group of PLPs that this PLP belongs to
	The code rate of this PLP
	The constellation of this PLP
Rotated constellation indicator	
PLP Loop	The FEC type used on this PLP
	Maximum number of PLP blocks
	The T2 frame interval within the superframe of this PLP
	Time Interleaver length
	Time Interleaver type indicator
	In-band flag. Indicates whether PLP carries in-band signalling
	TS error flag
	TS sync flag
	TS valid flag

The following parameters are not supported by monitoring as along as Time-Frequency-Slicing (TFS) is not implemented. L1-pre signaling	T2 version
	RF Loop
	RF IDX
	Frequency
	PLP Loop
TS DVB descrambler	First RF IDX
	First frame IDX
	PID Filter (TBD)
	Each TSD can filter up to 32 configurable PIDs
	PID filter can check continuity counter
Supports all DVB-T2 modes, including	PID filter can check TS packet syntax (Adaptation field length, adaptation field flags, etc.)
	Single and multiple-PLPs
Simple API	SISO and MISO transmission
	Fully-automatic acquisition
	Fully-automatic L1-signalling decoding
Stream processor for automatic common- and data-PLP combination	Automatic guard-interval detection
	Automatically-calculated constant-rate TS output (using L1 signalling and ISSY)
	Signal Analysis
Signal Analysis	Constellation plot
	Channel impulse response plot

DVB-T/H AND DVB-T2 RECEIVER


Tuner	Frequency range: Agile tuning of every frequency between 42 and 866 MHz
	Band: VHF and UHF
	Channel bandwidth: 6, 7 and 8 MHz
Supported standards	Reception optimized for UE CCIR digital channels
	DVB - T/H - ETSI EN 300 744
	DVB - T2 - ETSI EN 300 755 v1.2.1_0.11(2009-2010)
	Complies with all European standards for static and portable equipment including NorDig Unified 2.0, DTG 6.1, Ebook
	Fully compliant with DTG6.1 and targeting NorDig-T2 addendum to Nordig Unified Requirements Ver2.1
Supported standards DVB-T demodulator features	Smart Auto Acquisition controller with fast 2k/8k acquisition, low processor overhead and re-acquisition mode
	Automatic spectral inversion
	Enhanced SFN perf. with pre/post-cursive echoes inside/outside guard
	Enhanced Impulse noise cancellation algorithm compliant with DTG 6.1 Ebook
Enhanced ACI protection and performance with CCI	
Advanced channel corrector for low multipath loss and enhanced Doppler performance	

HARDWARE CONNECTORS

RF input to the device	
N° input	1
Connector type	LNB (female)
R input	75 Ω
V input	16 dBuV to 115 dBuV
Frequency	42 to 866 MHz
Smart-card input	
N° input	1
Connector type	PCMCIA
N° connectors	1
Connector	RJ45
Standard supported	IEEE 802.3
TS output from the system	
N° Output	1
Connector type	MCX
R input	75 Ω
V input	800 mVpp (500 to 1200mVpp)
Standard	CEI EN 50083-9

Power Supply
Dual Power Supply (only in 1+1 or 2+0 configuration)
110/220V AC Autoswitching
48V DC




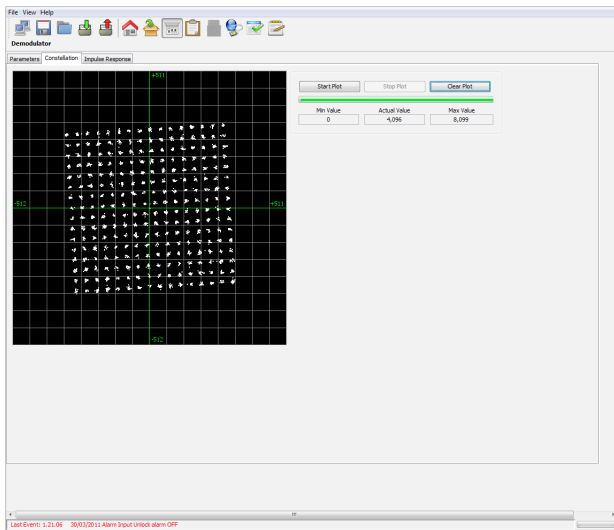

Demodulator - Constellation

Statistics T2 Parameters Constellation Channel Impulse Response			
L1 Parameters			
Input Stream Type	L1_MOD	CELL_ID	L1_P008
TS	64-QAM	0	SUB_STREAM_PER_FRAME
BWT_EXT	L1_COD	NETWORK_ID	NUM_RP
Extended Carrier Mode	L2	0	NUM_AIX
S1_fld	L1_FEC_TYPE	T2_SYSTEM_ID	NUM_AIX
T2_SISO	LDPC_SIK	0	0
FFT_size	L1_Fec_Size	Regen_Flag	FEP_TYPE
SIK	16,384,000	0	0
L1_Repetition_Flag	L1_Post_3/4s_Size	L1_POST_EXTENSION	FEP_LENGTH
Disabled	20,840,448	Not present	0
GUARD_INTERVAL	PILOT_PATTERN	NUM_SF	FEP_INTERVAL
1/28	PP2	0	0
PAPR	TM_AVAILABILITY	CURRENT_RF_IDX	
NO PAPR	0	0	
S1_LSB	Num_Data_symbols	NUM_T2_FRAME	
Not Meas	59	2	
RP actual			
RP_ID	RP_FEC_TYPE	RP_ID	RP_FEC_TYPE
0	64-QAM	0	3/8 LDPC
RP_TYPE	RP_NUM_BLOCKS_MAX	RP_TYPE	RP_NUM_BLOCKS_MAX
DATA RP Type 1	202	Common RP	0
RP_PAYLOAD_TYPE	FRAME_INTERVAL	RP_PAYLOAD_TYPE	FRAME_INTERVAL
TS	1	GPRS	0
FF_FLAG	TIME_B_LENGTH	FF_FLAG	TIME_B_LENGTH
0	0	0	0
FIRST_RF_IDX	TIME_B_TYPE	FIRST_RF_IDX	TIME_B_TYPE
0	Single T2 frame per IF	0	Single T2 frame per IF
FIRST_FRAME_IDX	IN-BAND_FLAG	FIRST_FRAME_IDX	IN-BAND_FLAG
0	Type sig. is not carried	0	Type sig. is not carried
RP_GROUP_ID	RP_MOD	RP_GROUP_ID	RP_MOD
1	256-QAM	0	QPSK
RP_COD	RP_ROTATION	RP_COD	RP_ROTATION
2/3	Rotation is used	1/2	Rotation is not used

Demodulator - T2 parameters

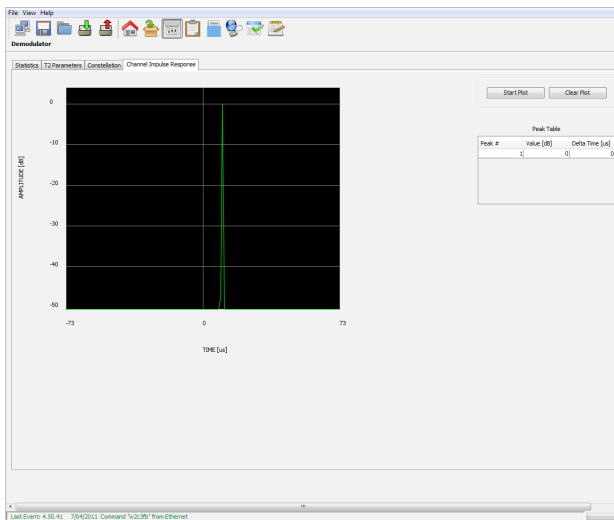

Demodulator - Impulse Response

Input Decoder

Tuner Monitoring

Tuner Setting

Smart Card Information

Actual TS ID: 960

Stored TS ID: 960

Module Name: Aston Module Pro 2.1800

Operator Name: MEDUASET

Expiration Date: 01/1/90 - 08/24/11

Subs Rights: 63

Temperature: Case Temperature [°C]: 51

Temp. Alarm Thr [°C]: 60

Temp. Warning Thr [°C]: 80

Input

Demodulator	
Statistics	T2 Parameters
Pre Idet BER [1e-7]	C/N [dB]
2.396	
Pre Icbh BER [1e-7]	Pre viterbi BER [1e-7]
0	
Post Icbh FER	Pre RS BER [1e-7]
0	
Current LDPC Iterations	RS Error
1	
S1_fld	Constellation
T2_SISO	Her Mode
SIK	Her Mode
BWT_EXT	HP FEC
Normal Carrier Mode	LP FEC
GUARD_INTERVAL	FFT
1/8	
PAPR	Guard Time
NO PAPR	
PILOT_PATTERN	Cell ID
PP2	
CELL_ID	
0	
NETWORK_ID	
0	
T2_SYSTEM_ID	
0	

Demodulator - Statistics

Service List					
Service Name	Service ID	Video PID	Audio Info	PCR PID	TTX PID
Service 1	6001	0	0	8191	0
Service 2	6002	0	0	8191	0
Service 3	6003	0	0	8191	0
Service 4	6004	0	0	8191	0
Service 5	6005	0	0	8191	0
Service 6	6006	0	0	8191	0
Service 7	6007	1660	1661 Ita	8191	0
Service 8	6008	0	0	8191	0
Ratek+1	6104	1660	1661 Ita	1660	0
Canes+1	6105	1640	1641 Ita	1640	0
Itala+1	6106	1650	1651 Ita	1650	0
BOING TEST	6107	1820	1821 Ita	1820	0
Canes HD	6305	2730	2733	2730	0
Itala HD	6306	2740	2743	2740	0

Service list